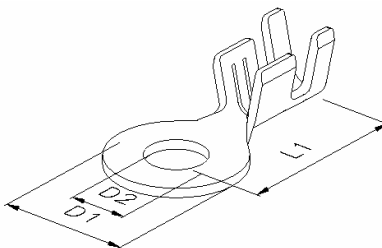


# HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt  mm <sup>2</sup>	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke  mm	Verp.- Ein- heit
					mm	mm	mm		
 <p>Längstransport</p>	22.760.110	0,5 – 1,0	CuZn	blank	9,5	7	2,7	0,5	10.000
	22.760.120		CuZn	Sn					
	22.760.310		CuSn	blank					
	22.760.320		CuSn	Sn					
	23.060.110	0,5 – 1,0	CuZn	blank	9,5	7	3	0,5	10.000
	23.060.120		CuZn	Sn					
	23.060.310		CuSn	blank					
	23.060.320		CuSn	Sn					
	23.160.110	0,5 – 1,0	CuZn	blank	9,5	7	3,1	0,5	10.000
	23.160.120		CuZn	Sn					
	23.160.310		CuSn	blank					
	23.160.320		CuSn	Sn					
	23.360.110	0,5 – 1,0	CuZn	blank	9,5	7	3,3	0,5	10.000
	23.360.120		CuZn	Sn					
	23.360.310		CuSn	blank					
	23.360.320		CuSn	Sn					
	23.860.110	0,5 – 1,0	CuZn	blank	9,5	7	3,8	0,5	10.000
	23.860.120		CuZn	Sn					
	23.860.310		CuSn	blank					
	23.860.320		CuSn	Sn					
	24.060.110	0,5 – 1,0	CuZn	blank	9,5	7	4	0,5	10.000
	24.060.120		CuZn	Sn					
	24.060.310		CuSn	blank					
	24.060.320		CuSn	Sn					
	24.360.110	0,5 – 1,0	CuZn	blank	9,5	7	4,3	0,5	10.000
	24.360.120		CuZn	Sn					
	24.360.310		CuSn	blank					
	24.360.320		CuSn	Sn					