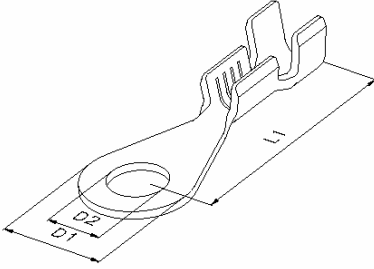
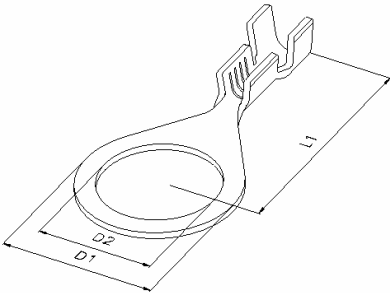


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- querschnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	23.210.110	0,5 – 1,0	CuZn	blank	18,3	8	3,2*	0,6	6.000
	23.210.120		CuZn	Sn					
	23.210.310		CuSn	blank					
	23.210.320		CuSn	Sn					
	23.810.110	0,5 – 1,0	CuZn	blank	18,3	8	3,8	0,6	6.000
	23.810.120		CuZn	Sn					
	23.810.310		CuSn	blank					
	23.810.320		CuSn	Sn					
	24.310.110	0,5 – 1,0	CuZn	blank	18,3	8	4,3*	0,6	6.000
	24.310.120		CuZn	Sn					
	24.310.310		CuSn	blank					
	24.310.320		CuSn	Sn					
	25.210.110	0,5 – 1,0	CuZn	blank	18,3	8	5,2	0,6	6.000
	25.210.120		CuZn	Sn					
	25.210.310		CuSn	blank					
	25.210.320		CuSn	Sn					
Ringkabelschuh	Artikel-Nr.	Leiter- querschnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	28.413.110	0,5 – 1,0	CuZn	blank	21	14	8,4*	0,6	4.000
	28.413.120		CuZn	Sn					
	28.413.310		CuSn	blank					
	28.413.320		CuSn	Sn					
	29.513.110	0,5 – 1,0	CuZn	blank	21	14	10,5	0,6	4.000
	29.513.120		CuZn	Sn					
	29.513.310		CuSn	blank					
	29.513.320		CuSn	Sn					