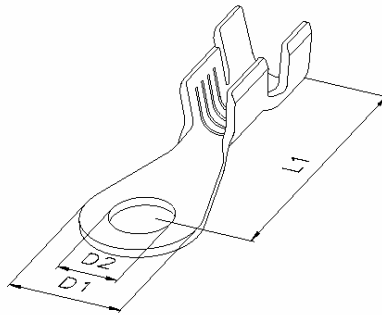
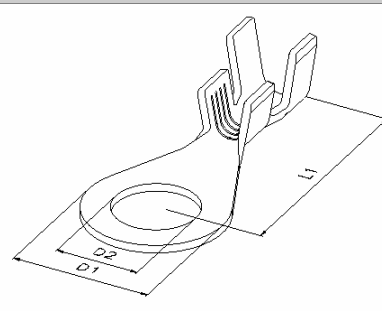


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	23.225.110	1,0 – 2,5	CuZn	blank	18,3	8	3,2*	0,6	5.000
	23.225.120		CuZn	Sn					
	23.225.310		CuSn	blank					
	23.225.320		CuSn	Sn					
	23.825.110	1,0 – 2,5	CuZn	blank	18,3	8	3,8	0,6	5.000
	23.825.120		CuZn	Sn					
	23.825.310		CuSn	blank					
	23.825.320		CuSn	Sn					
	24.325.110	1,0 – 2,5	CuZn	blank	18,3	8	4,3*	0,6	5.000
	24.325.120		CuZn	Sn					
	24.325.310		CuSn	blank					
	24.325.320		CuSn	Sn					
	25.225.110	1,0 – 2,5	CuZn	blank	18,3	8	5,2	0,6	5.000
	25.225.120		CuZn	Sn					
	25.225.310		CuSn	blank					
	25.225.320		CuSn	Sn					
Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	28.463.110	2,5 – 6,0	CuZn	blank	24	14	8,4*	0,8	2.000
	28.463.120		CuZn	Sn					
	28.463.310		CuSn	blank					
	28.463.320		CuSn	Sn					
	29.563.110	2,5 – 6,0	CuZn	blank	24	14	10,5	0,8	2.000
	29.563.120		CuZn	Sn					
	29.563.310		CuSn	blank					
	29.563.320		CuSn	Sn					