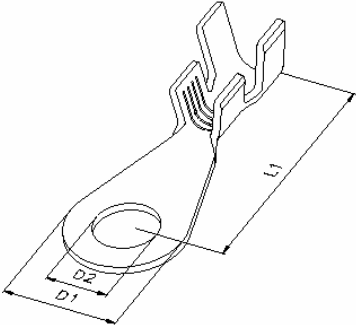



HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit	
		mm ²			mm	mm	mm	mm		
 <p>Längstransport * DIN 46 225</p>	25.362.110	2,5 – 6,0	CuZn	blank	25	12	5,3	0,8	2.000	
	25.362.120		CuZn	Sn						
	25.362.310		CuSn	blank						
	25.362.320		CuSn	Sn						
	26.562.110	2,5 – 6,0	CuZn	blank	25	12	6,5*	0,8	2.000	
	26.562.120		CuZn	Sn						
	26.562.310		CuSn	blank						
	26.562.320		CuSn	Sn						
	28.462.110	2,5 – 6,0	CuZn	blank	25	12	8,4	0,8	2.000	
	28.462.120		CuZn	Sn						
	28.462.310		CuSn	blank						
	28.462.320		CuSn	Sn						
	Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
			mm ²			mm	mm	mm	mm	
	 <p>Längstransport</p>	24.359.110	4,0 – 6,0	CuZn	blank	21,3	7,8	4,3	0,8	3.000
		24.359.120		CuZn	Sn					
24.359.310		CuSn		blank						
24.359.320		CuSn		Sn						