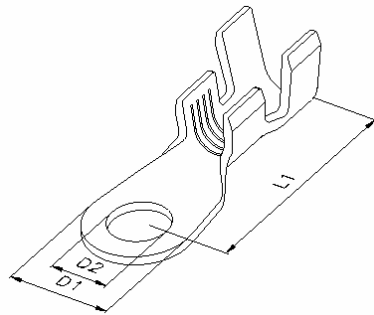
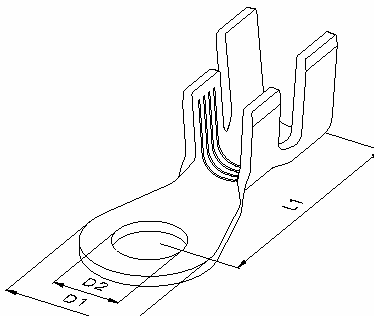


# HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm <sup>2</sup>			mm	mm	mm		
 <p>Längstransport</p>	25.361.110	4,0 – 6,0	CuZn	blank	20,5	9,5	5,3	0,8	3.000
	25.361.120		CuZn	Sn					
	25.361.310		CuSn	blank					
	25.361.320		CuSn	Sn					
Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
	mm <sup>2</sup>	mm			mm	mm			
 <p>Längstransport * DIN 46 225</p>	25.391.110	6,0 – 10,0	CuZn	blank	23	12	5,3	1	1.000
	25.391.120		CuZn	Sn					
	25.391.310		CuSn	blank					
	25.391.320		CuSn	Sn					
	26.591.110	6,0 – 10,0	CuZn	blank	23	12	6,5*	1	1.000
	26.591.120		CuZn	Sn					
	26.591.310		CuSn	blank					
	26.591.320		CuSn	Sn					
	28.491.110	6,0 – 10,0	CuZn	blank	23	12	8,4	1	1.000
	28.491.120		CuZn	Sn					
	28.491.310		CuSn	blank					
	28.491.320		CuSn	Sn					