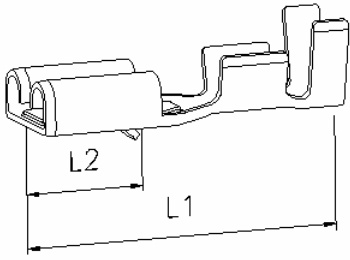
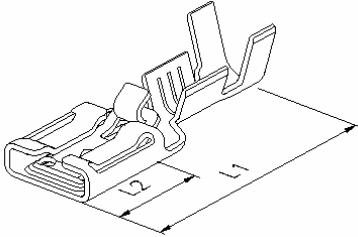


HS United European Connectors

Flachsteckhülse 4,8 mm mit Rastnase ohne Rastpunkt		Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
			mm ²			mm	mm	mm	mm	
 <p>Längstransport</p>	24.810.112.005	0,5 – 1,0	CuZn	blank	0,5	16	6	0,35	10.000	
	24.810.122.005		CuZn	Sn						
	24.810.312.005		CuSn	blank						
	24.810.322.005		CuSn	Sn						
	24.810.112	0,5 – 1,0	CuZn	blank	0,8	16	6	0,35	10.000	
	24.810.122		CuZn	Sn						
	24.810.312		CuSn	blank						
	24.810.322		CuSn	Sn						
	24.825.112.005	1,0 – 2,5	CuZn	blank	0,5	16	6	0,35	10.000	
	24.825.122.005		CuZn	Sn						
	24.825.312.005		CuSn	blank						
	24.825.322.005		CuSn	Sn						
	24.825.112	1,0 – 2,5	CuZn	blank	0,8	16	6	0,35	10.000	
	24.825.122		CuZn	Sn						
	24.825.312		CuSn	blank						
	24.825.322		CuSn	Sn						
Flachsteckhülse 4,8 mm verriegelbar, leicht steckbar		Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
			mm ²			mm	mm	mm	mm	
 <p>Längstransport</p>	34.810.115	0,5 – 1,0	CuZn	blank	0,5	15,6	6	0,3	12.000	
	34.810.125		CuZn	Sn						
	34.810.315		CuSn	blank						
	34.810.325		CuSn	Sn						
	34.810.110	0,5 – 1,0	CuZn	blank	0,8	15,6	6	0,3	12.000	
	34.810.120		CuZn	Sn						
	34.810.310		CuSn	blank						
	34.810.320		CuSn	Sn						