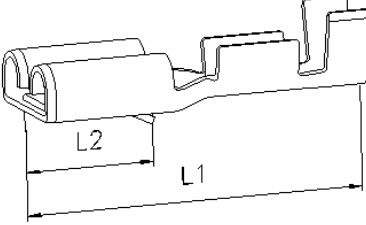
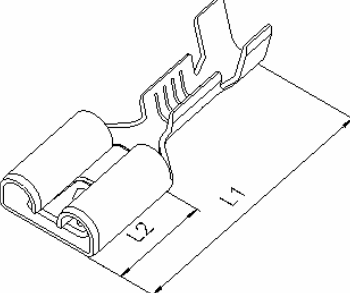


# HS United European Connectors

Flachsteckhülse 6,3 mm mit Rastnase ohne Rastpunkt	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Material- stärke	Verp.- Ein- heit
		mm <sup>2</sup>			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 340 Teil 3</p>	26.305.112	0,35 – 0,75	CuZn	blank	0,8	19,2	7,4	0,4	6.000
	26.305.122		CuZn	Sn					
	26.305.312		CuSn	blank					
	26.305.322		CuSn	Sn					
	26.310.112	0,5 – 1,0 *	CuZn	blank	0,8	19,2	7,4	0,4	6.000
	26.310.122		CuZn	Sn					
	26.310.312		CuSn	blank					
	26.310.322		CuSn	Sn					
	26.325.112	1,0 – 2,5 *	CuZn	blank	0,8	19,2	7,4	0,4	6.000
	26.325.122		CuZn	Sn					
	26.325.312		CuSn	blank					
	26.325.322		CuSn	Sn					
	26.360.112	4,0 – 6,0	CuZn	blank	0,8	19,2	7,4	0,4	5.000
	26.360.122		CuZn	Sn					
	26.360.312		CuSn	blank					
	26.360.322		CuSn	Sn					
Flachsteckhülse 6,3 mm leicht steckbar	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Material- stärke	Verp.- Ein- heit
		mm <sup>2</sup>			mm	mm	mm	mm	
 <p>Längstransport</p>	76.310.115	0,5 – 1,0	CuZn	blank	0,5	19,2	7,4	0,35	6.000
	76.310.125		CuZn	Sn					
	76.310.315		CuSn	blank					
	76.310.325		CuSn	Sn					
	76.310.110	0,5 – 1,0	CuZn	blank	0,8	19,2	7,4	0,35	6.000
	76.310.120		CuZn	Sn					
	76.310.310		CuSn	blank					
	76.310.320		CuSn	Sn					